
swift-browser-ui

Release 2.0.0

CSC Developers

Mar 02, 2022

CONTENTS:

1	Setup Instructions	3
1.1	Environment Setup	3
1.2	Scaling up the service	5
1.3	Further reading and citations	5
2	Getting started	7
2.1	Command line interface	7
3	Deployment	9
3.1	Dockerfile	9
3.2	Database for sharing functionality	9
3.3	Sharing functionality back-end	9
3.4	Shared access request back-end	10
3.5	Upload runner back-end	10
3.6	Kubernetes Integration	11
4	Architecture	13
4.1	About login process	13
4.2	API	13
5	Web User Interface	15
5.1	User information page	15
5.2	Container page	15
5.3	Object page	15
5.4	Non-whitelisted mode	16
6	Sharing functionality	17
6.1	Sharing a container	17
6.2	Viewing containers shared from the project	17
6.3	Viewing containers shared to the project	18
7	Shared access requests	19
8	Upload runner	21
8.1	File Upload	21
8.2	File Download	21
8.3	Container Download	22
8.4	Copying a container	22
9	Python Modules	23
9.1	swift_browser_ui.ui._convenience	23

9.2	swift_browser_ui.ui.api	24
9.3	swift_browser_ui.ui.discover	24
9.4	swift_browser_ui.ui.exceptions	25
9.5	swift_browser_ui.ui.front	25
9.6	swift_browser_ui.ui.login	25
9.7	swift_browser_ui.ui.middlewares	25
9.8	swift_browser_ui.ui.misc_handlers	26
9.9	swift_browser_ui.ui.server	26
9.10	swift_browser_ui.ui.settings	26
9.11	swift_browser_ui.ui.shell	27
9.12	swift_browser_ui.ui.signature	27
9.13	swift_browser_ui.sharing.bindings.bind	28
9.14	swift_browser_ui.sharing.api	28
9.15	swift_browser_ui.sharing.db	28
9.16	swift_browser_ui.sharing.server	29
9.17	swift_browser_ui.sharing.shared	29
9.18	swift_browser_ui.request.bindings.bind	29
9.19	swift_browser_ui.request.api	29
9.20	swift_browser_ui.request.db	30
9.21	swift_browser_ui.request.server	30
9.22	swift_browser_ui.upload.api	31
9.23	swift_browser_ui.upload.auth	31
9.24	swift_browser_ui.upload.common	31
9.25	swift_browser_ui.upload.download	32
9.26	swift_browser_ui.upload.replicate	32
9.27	swift_browser_ui.upload.server	32
9.28	swift_browser_ui.upload.upload	33
10	Testing	35
10.1	Unit Testing	35
10.2	User Interface Testing	35
11	Tools used in project	37
11.1	Backend	37
11.2	Frontend	37
11.3	Tests	38
11.4	Documentation	38
12	Indices and tables	39
	Python Module Index	41
	Index	43

A Web UI object browser for object storage back-ends using Openstack Keystone for authentication (e.g. CSC Pouta). It uses federated login via [HAKA](#), via the endpoints provided by [OpenStack Keystone](#).

Out of the box the `swift-browser-ui` offers:

- UI for browsing [SWIFT](#) objects;
- support for additional features like uploading files >5GiB in size;
- support for federated authentication of an user with their HAKA credentials using OpenStack Keystone;
- UI based on [Vue.js](#) with [Buefy](#) framework;
- asynchronous web server.

SETUP INSTRUCTIONS

The program can be installed with pip from the git repository:

```
# Requires python >= 3.6 (recommended >= 3.7)
git clone git@github.com:CSCfi/swift-browser-ui.git
# Frontend files need to be separately built
cd swift_browser_ui_frontend && npm run build && cd ..
pip install .
```

Note: The program uses external services that need to be present in order to enable all functionality, like sharing. These additional services can be found from the git repositories. The instructions for getting the services up and running can be found in their respective repositories, and partly under the *Deployment* section.

- <https://github.com/cscfi/swift-x-account-sharing>
 - <https://github.com/cscfi/swift-sharing-request>
 - <https://github.com/cscfi/swiftui-upload-runner>
-

1.1 Environment Setup

Hint: The command line arguments can also be configured as environment variables, the environment variable syntax is documented in the python click documentation¹, the shape of a variable could take the following forms:

- `BROWSER_$ARGUMENT` - affects every command;
 - `BROWSER_$SUBCOMMAND_$ARGUMENT` - affects subcommands e.g. `start`, `install`.
-

Variables are depicted in the table below:

¹ <https://click.palletsprojects.com/en/7.x/options/#values-from-environment-variables>

Environment variable	De- fault	Description		
BROWSER_START_AUTH_ENDPOINT_URL		URL to use as the Openstack authentication backend		
BROWSER_START_PORT	8080	Port that the service will listen		
BROWSER_START_SET_ORIGIN_ADDRESS		Authentication return address to which WebSSO should redirect		
BROWSER_START_HAS_TRUST		Flag if the program is listed on the trusted_dashboards		
BROWSER_START_SHARING_ENDPOINT_URL		external URL for the container sharing backend		
BROWSER_START_REQUEST_ENDPOINT_URL		external URL for the shared access request backend		
BROWSER_START_RUNNER_ENDPOINT		internal URL for the upload, copy, download runner		
SWIFT_UI_SHARING_REQUEST_TOKEN		Token for signing the internal sharing & request API requests		
BROWSER_START_RUNNER_EXT_ENDPOINT		external URL for the upload runner service		
BROWSER_START_SHARING_INT_ENDPOINT_URL		internal URL / hostname of the sharing API		
BROWSER_START_REQUEST_INT_ENDPOINT_URL		internal URL / hostname of the request API		
LOG_LEVEL		set logging level e.g. INFO, DEBUG		

Hint: Authentication endpoint can also be specified with any openrc file, which can be usually downloaded from Openstack. The setup script from Openstack might ask for your password, but this isn't a required input and can be left empty.

1.1.1 Example environment variable files

For the Pouta test environment with NGINX TLS termination proxy in use:

```
export BROWSER_START_AUTH_ENDPOINT_URL="https://pouta-test.csc.fi:5001/v3"
export BROWSER_START_PORT="8081"
export BROWSER_START_SET_ORIGIN_ADDRESS="https://vm1950.kaj.pouta.csc.fi:8080/login/
↔webssso"
```

For the Pouta production environment for testing unsecurely without trust:

```
export BROWSER_START_AUTH_ENDPOINT_URL="https://pouta.csc.fi:5001/v3"
```

1.1.2 Setting up TLS termination proxy

The backend can be run in secure mode, i.e. with HTTPS enabled, but for scaling up a TLS termination proxy is recommended. Setting up TLS termination is outside the scope of this documentation, but a few useful links are provided along with the necessary configs regarding this service.^{2,3}

² <https://docs.nginx.com/nginx/admin-guide/web-server/reverse-proxy/>

³ <https://docs.nginx.com/nginx/admin-guide/security-controls/terminating-ssl-http/>

1.2 Scaling up the service

The service runs in a single-threaded mode, since the library that's used for providing the back-end isn't multi-threaded. Therefore to completely use up a server's resources a multi-processed approach must be chosen. The easiest way to do this is to set up a reverse proxy, which can be run in the same server that acts as the TLS endpoint.

The aiohttp documentation already gives us directions for the set-up⁴ so they won't be provided here. In its current state the project should be configured to use TCP sockets in NGINX, so they're the directions to use in the aforementioned link. Also change the server run command to enable running the project as follows:

```
command=swift-browser-ui start --port=808%(process_num)s
```

1.3 Further reading and citations

⁴ <http://docs.aiohttp.org/en/stable/deployment.html>

GETTING STARTED

Note: Please note that the things related to project development aren't documented here, and everything on this page is only related to the running of the program

After the setup has been completed as illustrated in *Setup Instructions* the server can be used with the `swift-browser-ui` command, the command line options can be found below.

2.1 Command line interface

The project has a command line interface, that can be used to quickly test the frontend for different endpoints and usage cases. It provides basic functionality e.g. starting the server and specify a variety of different settings, detailed below:

```
swift-browser-ui --help
Usage: swift-browser-ui [OPTIONS] COMMAND [ARGS]...

Command line interface for managing swift-browser-ui.

Options:
--version          Show the version and exit.
-v, --verbose     Increase program verbosity.
-D, --debug       Enable debug level logging.
--logfile TEXT    Write program logs to a file.
--help            Show this message and exit.

Commands:
start             Start the browser backend and server.
```

2.1.1 Global arguments

The following command line arguments affect all of the commands in the application:

- verbose** Flag to increase program verbosity.
- debug** Enable program debug messages.
- logfile FILE** Save all program output to a file.
- help** Help on the CLI usage.
- version** Display the program version

2.1.2 The server startup

The following command line arguments are available for server startup.

```
swift-browser-ui start --help
Usage: swift-browser-ui start [OPTIONS]

Start the browser backend and server.

Options:
-p, --port INTEGER          Set the port the server is run on.
--auth-endpoint-url TEXT   Endpoint for the Openstack keystone API in use.
--has-trust                Flag if the program is listed on the
                           trusted_dashboards in the specified address.
--set-origin-address TEXT  Set the address that the program will be
                           redirected to from WebSSO
--secure                   Enable secure running, i.e. enable HTTPS.
--ssl-cert-file TEXT       Specify the certificate to use with SSL.
--ssl-cert-key TEXT        Specify the certificate key to use with SSL.
--help                     Show this message and exit.
```

- port PORT** Set the port that the server will use.
- auth-endpoint-url URL REQUIRED** – Set the endpoint that the program uses for authentication. The program cannot work without this.
- set-origin-address TEXT** Set the address that the program will be redirected to from WebSSO.
- has-trust** Toggle if the program has trust on the specified authentication endpoint, i.e. if the program has been listed on the respective Openstack keystone trusted_dashboard list.¹
- secure** Enable HTTPS on the server, to enable secure requests if there's no TLS termination proxy.
- ssl-cert-file TEXT** Specify SSL certificate file. Required when running in secure mode.
- ssl-cert-key TEXT** Specify SSL certificate key. Required when running in secure mode.

¹ <https://docs.openstack.org/keystone/pike/advanced-topics/federation/webssso.html>

DEPLOYMENT

The recommended means of deployment for a production web server via a container image (e.g. Docker image). In this section we illustrate several means of building and running a the `swift-browser-ui` application via a Docker container image.

3.1 Dockerfile

Using vanilla docker in order to build the image - the tag can be customised:

```
$ git clone https://github.com/CSCfi/swift-browser-ui/
$ docker build -t cscfi/swift-ui .
$ docker run -p 8080:8080 cscfi/swift-ui
$ # or with environment variables
$ docker run -p 8080:8080 \
    -e BROWSER_START_AUTH_ENDPOINT_URL=https://pouta.csc.fi:5001/v3 \
    cscfi/swift-ui
```

3.2 Database for sharing functionality

Both `swift-x-account-sharing` and `swift-sharing-request` services need access to a PostgreSQL database in order to work. In a usual deployment this is done within a containerized stack. Necessary files to build a database container for testing can be found in the [deployment example repository](#). The file `init-project-db.sh` contains the necessary input to build the DB schema, and the same commands can be used to build the schema into an existing database server (as is the case when running on openshift using a base image for the database)

3.3 Sharing functionality back-end

Sharing functionality should be run by running it in a container. Easiest way to do this is to use the docker-compose fields provided in the [deployment example repository](#). The sharing functionality requires the following environment variables to be present in order to work:

Environment variable	Default	Re-quired	Description
SWIFT_UI_API_AUTH_TOKENS		True	Comma separated list of master tokens that can be used for signing the API requests
SHARING_DB_NAME	swift-sharing		Name for the sharing functionality database
SHARING_DB_USER	sharing		User used in connecting to the sharing functionality database
SHARING_DB_HOST		True	Sharing functionality database address/hostname
SHARING_DB_PASSWORD		True	Sharing functionality database password

3.4 Shared access request back-end

Shared access request functionality should be run by running it in a container. Easiest way to do this is to use the docker-compose files provided in the [deployment example repository](#). The shared access request functionality requires the following environment variables to be present in order to work:

Environment variable	Default	Re-quired	Description
SWIFT_UI_API_AUTH_TOKENS		True	Comma separated list of master tokens that can be used for signing the API requests
REQUEST_DB_NAME	swiftrequest		Name for the shared access request functionality database
REQUEST_DB_USER	request		User used in connecting to the shared access request functionality database
REQUEST_DB_HOST		True	Shared access request functionality database address/hostname
REQUEST_DB_PASSWORD		True	Shared access request functionality database password

3.5 Upload runner back-end

SwiftUI upload runner should be run by running it in a container. Easiest way to do this is to use the docker-compose files provided in the [deployment example repository](#). The upload runner requires the following environment variables to be present in order to work:

Environment variable	De-fault	Re-quired	Description
SWIFT_UI_API_AUTH_TOKENS		True	Comma separated list of master tokens that can be used for signing the API requests
BROWSER_START_AUTH_ENDPOINT_URL			Openstack keystone endpoint for authentication – can also be specified with OS_AUTH_URL
OS_AUTH_URL			Openstack keystone endpoint for authentication – can also be specified with BROWSER_START_AUTH_ENDPOINT_URL

The authentication information can also be gotten through sourcing any Openstack credential v3 file, the password is not necessary as only the authentication endpoint information will be used.

3.6 Kubernetes Integration

For use with Kubernetes we provide YAML configuration. Further configuration files are provided in [deployment example repository](#)

```
apiVersion: apps/v1
kind: Deployment
metadata:
  labels:
    role: swiftui
  name: swiftui
  namespace: swiftui
spec:
  selector:
    matchLabels:
      app: swiftui
  template:
    metadata:
      labels:
        app: swiftui
        role: swiftui
    spec:
      containers:
        - image: cscfi/swift-ui
          imagePullPolicy: Always
          name: swiftui
          ports:
            - containerPort: 8080
              name: swiftui
              protocol: TCP
---
apiVersion: v1
kind: Service
metadata:
  name: swiftui
  labels:
    app: swiftui
spec:
  type: NodePort
  ports:
    - port: 8080
      targetPort: 8080
      protocol: TCP
      name: web
  selector:
    app: swiftui
```


ARCHITECTURE

In this section we would like to emphasize some of the core parts of the application and describe their inner-workings.

4.1 About login process

The program uses the WebSSO support provided by [Openstack](#), whenever the support has been implemented. At minimum the program requires the Openstack instance that it's supposed to be used with to implement the federated authentication, in which the non-WebSSO token delivery method can be used.

A collection of links to provide a recap of the things necessary to know about Openstack WebSSO implementation:

- [Federated authentication API in Openstack](#)
- [WebSSO details conveniently explained \(or how it works in the OS Horizon dashboard\)](#)
- [Openstack Horizon dashboard WebSSO guide](#)

The login process follows an *almost ordinary* process of federated authentication with SAML, but that is something we don't need to concern ourselves with – Openstack identity API takes care of that. The manual version works in much the same way, but the user is required to copy and paste the token themselves, since Openstack refuses to redirect to untrusted platforms.

Fig. 1: Sequence diagram of the login process.

4.2 API

Hint: The API has several endpoints, which are documented here. The API can also be used with the convenience functions, located in the `api.js` file.

Note: All API queries expect an open session to Openstack, which means the queries towards Openstack are correctly scoped to the open project without further information in the API query. This of course requires a valid session token to be present with every API call.

The following flowchart gives a generic image of the possible responses from the API during normal usage.

The api is documented in the `api.yml` file, that conforms to the OpenAPI specification (the file can be rendered with the [swagger editor](#)):

Fig. 2: Flowchart of the simplified API execute routes upon query.

WEB USER INTERFACE

The user interface defaults to a container listing, showing all the containers for the default active project of the user. The localization can be changed from the button in the up-right corner.

5.1 User information page

Behind the **User information** button in the front page, a user information dashboard is displayed. The dashboard displays statistics about the current resource usage, e.g.

- Current billing unit consumption
- Amount of containers and objects in a project
- Total project data usage.

Additional information on different billing details is also provided, in the links contained in the dashboard bottom tile.

Fig. 1: Image of the user information dashboard in an example project.

5.2 Container page

The default front-page for the browser is the container listing, which will default to the first project that Openstack proposes. This page shows the containers available to be browsed, as well as general information about them. The container can be opened with a double-click, or if the table row's active, enter.

Fig. 2: Image of the container listing for an example project.

5.3 Object page

Any container can be opened, and the contents viewed. The object page shows information on the objects, e.g.

- The object name
- The object ETag
- A download link for the object
- Content type

- Last date of modification

Fig. 3: Image of the object listing for an example container.

Additional information is not shown by default, but can be opened with the chevron located in the beginning of each row.

Fig. 4: Image of the object listing, showing the additional details.

5.4 Non-whitelisted mode

When running a development environment that is not whitelisted to use the WebSSO for logins, the following login page will be displayed. The page is there to enable manual token delivery, since the server refuses to deliver it automatically to untrusted platforms. (i.e. copying and pasting the token)

Fig. 5: Image of the manual token delivery login page.

SHARING FUNCTIONALITY

The UI provides a simple way of sharing containers between different projects, provided you know the project that requests sharing. (If not, see the documentation on sharing requests)

6.1 Sharing a container

A container can be shared from the “share” button in the UI, on the row of the container in the container listing. Clicking the button takes one to the container sharing view, in which the user needs to specify the project/projects the container is going to be shared to, and what rights to give. The view also contains a button to synchronize any requests for accessing the container, if any are present. In case the user doesn’t want these requests fulfilled, they can be removed from the tags that are inputted into the sharing view.

The screenshot shows a form titled "Share the container". At the top, there are three toggle switches: "Grant read permissions" (off), "Grant write permissions" (off), and "Synchronize container share requests" (on). Below these are two input fields: "UIDs to share with" with a placeholder "Add UUIDs here" and "Container" with the value "demo-test-container". At the bottom, there are two buttons: "Cancel" and "Share".

Fig. 1: Image of the container sharing view for an example container

6.2 Viewing containers shared from the project

Containers that have been shared from a particular project can be viewed by navigating to the “Shared” page in the application navbar. From this view the shared access can be revoked, a new share initiated, or existing access synchronized to the sharing back-end, thus enabling it to be queried from the back-end in the future.

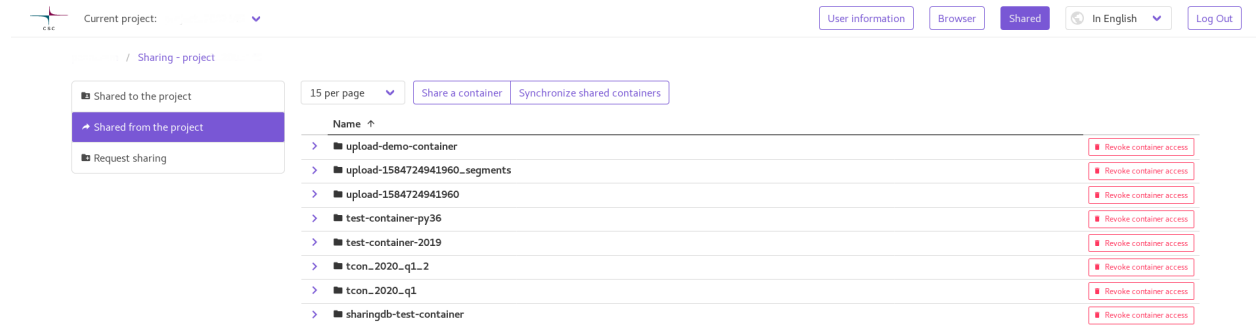


Fig. 2: Image of the view listing containers shared from the project

6.3 Viewing containers shared to the project

Containers that are shared to a particular project can be viewed by navigating to the “Shared” page in the application navbar. From this view the granted access can be viewed, and any container can be opened just like when using the normal container browsing view. All features available in the ordinary container view work, such as downloading, uploading (if write access is granted to the container) and copying the container.



Fig. 3: Image of the view listing containers shared to the project

SHARED ACCESS REQUESTS

The UI provides the possibility to request access to a container from a known project, which can be done via the shared access request page. This can be found under the “Shared” page in the navbar.

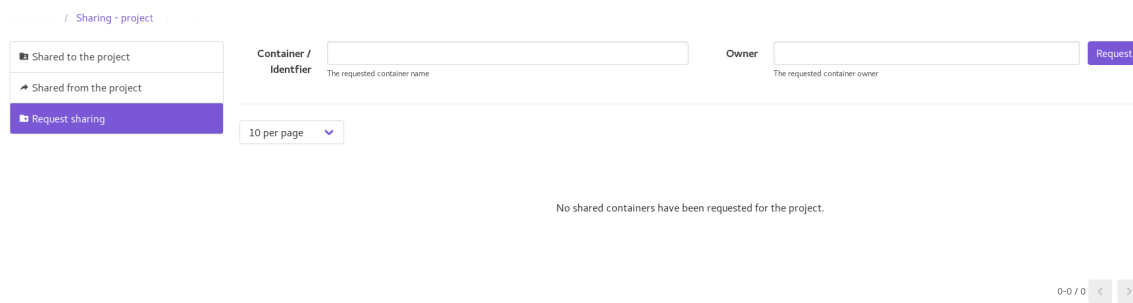


Fig. 1: Image of the container access request page

UPLOAD RUNNER

The UI provides an improved upload proxy / runner, that provides a possibility for more complicated operations not normally present on the object storage Web interface – these operations include e.g. uploading files into an object storage container, and downloading a whole container with API call.

8.1 File Upload

Files can be uploaded to an automatically generated container by drag'n'drop from the container listing page, or by using the upload button on top of the table. There's no limit on how large the files uploaded can be, but browser performance puts a practical limit somewhere in the neighborhood of 10GiB.

Uploading files to a specific container can be done by opening the container, and uploading while the container is open. This can again be done either by drag'n'drop or using the upload button.

Hint: If complete relative file paths or folder structure is to be preserved, the only option for uploading is drag'n'drop. Only files can be uploaded using the upload button

Hint: Chrome is recommended as the browser of choice when uploading large files, as the File API on Chrome is better implemented. Firefox tends to have issues on files >5GiB, especially with multiple files. Safari is not supported, but should work without problems – same issues present with Firefox apply.

Hint: Mobile devices are not supported for file uploads, but can work. This is, however, not guaranteed.

8.2 File Download

The upload runner is used to provide file downloads from shared containers in a similar manner to the way the downloads work from containers owned by the project that is currently active. To the user the download continues to be a simple download link

8.3 Container Download

Full containers can be downloaded from the UI using the download button either on the table row in the container listing, or a download button on the top of the table when viewing an open container. Downloading whole containers works the same in both owned and shared containers. The runner archives the container while the download is taking place, in order to prevent additional waiting for an archiving operation to finish. This has the added benefit of not requiring any intermediary storage for the archiving operation on the server side.

Hint: Due to the fact that the archive size can't be precisely calculated when archiving on the fly, the server is unable to provide a progress bar for a container download. A rough estimate can be generated by calculating the time value from the container size visible in the container listing using the available speed of the connection.

8.4 Copying a container

Containers can be copied using the copy button, either on the row of the container in the container listing view, or on top of the table when viewing a specific container. The copy operation can only be performed to a fresh container, to prevent accidental data loss in case of an incomplete copy operation on an object. User can also copy a shared container to the currently activated project.

Hint: The copy operation takes a long time, and is run in the background. The UI navigates back to the normal view after copying is initiated. Thus, the copy operation is eventually consistent.

Hint: The runner validates every copied object against the file checksum present in the object storage backend – thus, if the object is present in the newly created container, it's guaranteed to have been successfully copied over.

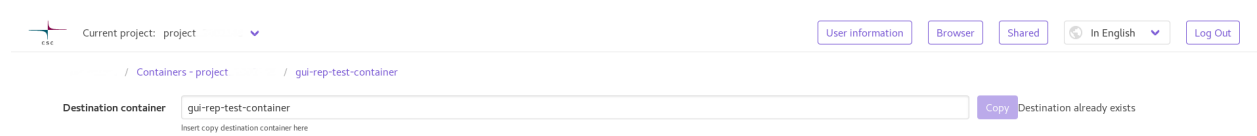


Fig. 1: Image of the container replication page when trying to copy over an existing container

PYTHON MODULES

Swift Browser UI ui module.

<i>swift_browser_ui.ui._convenience</i>	Miscellaneous convenience functions used during the project.
<i>swift_browser_ui.ui.api</i>	Project functions for handling API requests from front-end.
<i>swift_browser_ui.ui.discover</i>	Endpoints for different server information discovery.
<i>swift_browser_ui.ui.exceptions</i>	The module containing all <i>swift_browser_ui</i> exceptions.
<i>swift_browser_ui.ui.front</i>	Web frontend functions for stand-alone running.
<i>swift_browser_ui.ui.login</i>	A module for handling the project login related tasks.
<i>swift_browser_ui.ui.middlewares</i>	Middlewares for the <i>swift-browser-ui</i> .
<i>swift_browser_ui.ui.misc_handlers</i>	Handlers that can't easily be categorized.
<i>swift_browser_ui.ui.server</i>	<i>swift_browser_ui</i> server related convenience functions.
<i>swift_browser_ui.ui.settings</i>	Module containing all of the settings required in the global scope.
<i>swift_browser_ui.ui.shell</i>	CLI for configuring and launching the server.
<i>swift_browser_ui.ui.signature</i>	Module for handling queries for a valid Sharing/Request API signature.

9.1 *swift_browser_ui.ui._convenience*

Miscellaneous convenience functions used during the project.

Module contains functions for e.g. authenticating against openstack v3 identity API, cache manipulation, cookies etc.

Functions

<i>disable_cache(response)</i>	Add cache disabling headers to an aiohttp response.
<i>get_availability_from_token(token, client)</i>	List available domains and projects for the unscoped token specified.
<i>get_tempurl_key(request)</i>	Get the correct temp URL key from Openstack.
<i>open_upload_runner_session(request)</i>	Open an upload session to the token.
<i>sign(valid_for, path)</i>	Perform a general signature.
<i>test_swift_endpoint(endpoint)</i>	Test swift endpoint connectivity.

9.2 swift_browser_ui.ui.api

Project functions for handling API requests from front-end.

Functions

<code>add_project_container_acl(request)</code>	Add access for a project in container acl.
<code>get_access_control_metadata(request)</code>	Fetch a compilation of ACL information for sharing discovery.
<code>get_os_user(request)</code>	Fetch the session owning OS user.
<code>get_shared_container_address(request)</code>	Get the project specific object storage address.
<code>get_upload_session(request)</code>	Return a pre-signed upload runner session for upload target.
<code>os_list_projects(request)</code>	Fetch the projects available for the open session.
<code>remove_container_acl(request)</code>	Remove all allowed projects from container acl.
<code>remove_project_container_acl(request)</code>	Remove access from a project in container acl.
<code>swift_batch_update_object_metadata(request)</code>	Update metadata for an object.
<code>swift_create_container(request)</code>	Create a new container from name.
<code>swift_delete_container(request)</code>	Delete an empty container or batch delete objects.
<code>swift_delete_objects(request)</code>	Delete objects.
<code>swift_download_container(request)</code>	Point a user to the container download runner.
<code>swift_download_object(request)</code>	Point a user to a temporary pre-signed download URL.
<code>swift_download_shared_object(request)</code>	Point a user to the shared download runner.
<code>swift_get_batch_object_metadata(request)</code>	Batch get metadata for objects.
<code>swift_get_metadata_container(request)</code>	Get metadata for a container.
<code>swift_get_project_metadata(request)</code>	Get the bare minimum required project metadata from Openstack.
<code>swift_list_containers(request)</code>	Proxy Swift list buckets available to a project.
<code>swift_list_objects(request)</code>	List objects in a given bucket or container.
<code>swift_replicate_container(request)</code>	Point the user to container replication endpoint.
<code>swift_update_container_metadata(request)</code>	Update metadata for a container.

9.3 swift_browser_ui.ui.discover

Endpoints for different server information discovery.

Functions

<code>handle_discover(_)</code>	Reply with sharing information if sharing API is available.
---------------------------------	---

9.4 swift_browser_ui.ui.exceptions

The module containing all swift_browser_ui exceptions.

9.5 swift_browser_ui.ui.front

Web frontend functions for stand-alone running.

Functions

browse(_)	Serve the browser SPA when running without a proxy.
index(request)	Serve the index page when running without a proxy.
loginpassword(request)	Serve the username and password login page.

9.6 swift_browser_ui.ui.login

A module for handling the project login related tasks.

Functions

credentials_login_end(request)	Handle the login procedure with classic POST.
handle_login(request)	Create new session cookie for the user.
handle_logout(request)	Properly kill the session for the user.
login_with_token(request, token)	Log in a session with token.
sso_query_begin(_)	Display login page and initiate federated keystone authentication.
sso_query_end(request)	Handle the login procedure return from SSO or user from POST.
test_token(formdata, request)	Validate unscoped token.

9.7 swift_browser_ui.ui.middlewares

Middlewares for the swift-browser-ui.

Functions

check_session_at(request, handler)	Raise on expired sessions.
error_middleware(request, handler)	Return the correct HTTP Error page.
return_error_response(error_code)	Return the correct error page with correct status code.

9.8 swift_browser_ui.ui.misc_handlers

Handlers that can't easily be categorized.

Functions

<code>handle_bounce_direct_access_request(request)</code>	Redirect user to a correct access request page.
---	---

9.9 swift_browser_ui.ui.server

swift_browser_ui server related convenience functions.

Functions

<code>kill_dload_client(app)</code>	Kill download proxy client session.
<code>open_client_to_app(app)</code>	Open a client session for download proxies.
<code>run_server_insecure(app)</code>	Run the server without https enabled.
<code>run_server_secure(app, cert_file, cert_key)</code>	Run the server securely with a given ssl context.
<code>servinit([inject_middleware])</code>	Create an aiohttp server with the correct arguments and routes.

9.10 swift_browser_ui.ui.settings

Module containing all of the settings required in the global scope.

The different configurations are also listed here:

<code>auth_endpoint_url:</code>	The correct address for the relevant Openstack keystone instance, to enable the authentication backend Default: None
<code>has_trust:</code>	Information on whether or not the backend has trust on the specified endpoint, i.e. if the backend can use SSO Default: False
<code>swift_endpoint_url:</code>	The endpoint which the backend will use for OS Swift, to query the object storage. Default: None
<code>logfile:</code>	The file in which the logs will be written into, if the logfile is set. Default: None
<code>port:</code>	The port in which the server will answer from (this option is only relevant if the server is run in a standalone setup) Default: 8080
<code>verbose:</code>	Boolean value for increasing verbosity in the program Default: False
<code>debug:</code>	Set logging level to debug

(continues on next page)

(continued from previous page)

version:	Default: False Contains the current version for e.g. logging
static_folder:	Path to the folder that contains the static front-end files, only used when the server is deployed without a proxy like Nginx to host the static files, and handle load balancing Default: \$PWD/swift_browser_ui_frontend

Functions

set_key(key, value, log_message)	Set a key value if it's specified.
----------------------------------	------------------------------------

9.11 swift_browser_ui.ui.shell

CLI for configuring and launching the server.

Functions

main()	Run the CLI.
--------	--------------

9.12 swift_browser_ui.ui.signature

Module for handling queries for a valid Sharing/Request API signature.

Functions

handle_ext_token_create(request)	Handle call for an API token create.
handle_ext_token_list(request)	Handle call for listing API tokens.
handle_ext_token_remove(request)	Handle call for an API token delete.
handle_signature_request(request)	Handle call for an API call signature.

Container sharing backend for Openstack Swift.

<i>swift_browser_ui.sharing.bindings.bind</i>	Async Python bindings for the swift-x-account-sharing backend.
<i>swift_browser_ui.sharing.api</i>	Sharing backend API specification and implementation.
<i>swift_browser_ui.sharing.db</i>	Sharing backend database implementation.
<i>swift_browser_ui.sharing.server</i>	Sharing backend server module.
<i>swift_browser_ui.sharing.shared</i>	Global settings for the container sharing backend.

9.13 swift_browser_ui.sharing.bindings.bind

Async Python bindings for the swift-x-account-sharing backend.

Classes

SwiftXAccountSharing(url)	Swift X Account Sharing backend client.
---------------------------	---

9.14 swift_browser_ui.sharing.api

Sharing backend API specification and implementation.

Functions

access_details_handler(request)	Handle access-details endpoint query.
delete_container_shares_handler(request)	Delete all shares from a container.
delete_share_handler(request)	Handle unshare-container endpoint query.
edit_share_handler(request)	Handle container shared rights editions.
gave_access_handler(request)	Handle gave-access endpoint query.
handle_health_check(request)	Answer a service health check.
handle_user_add_token(request)	Add a token to the user.
handle_user_delete_token(request)	Delete a token from the user.
handle_user_list_tokens(request)	Get project token listing.
has_access_handler(request)	Handle has-access endpoint query.
share_container_handler(request)	Handle share-container endpoint query.
shared_details_handler(request)	Handle shared-details endpoint query.

9.15 swift_browser_ui.sharing.db

Sharing backend database implementation.

Classes

DBConn()	Class for the account sharing database functionality.
----------	---

9.16 swift_browser_ui.sharing.server

Sharing backend server module.

Functions

<code>init_server()</code>	Initialize the server.
<code>main()</code>	Run the server with the default run function.
<code>resume_on_start(app)</code>	Resume old instance from start.
<code>run_server_devel(app)</code>	Run the server in development mode (without HTTPS).
<code>save_on_shutdown(app)</code>	Flush the database on shutdown.

9.17 swift_browser_ui.sharing.shared

Global settings for the container sharing backend. Container access request backend for Openstack Swift.

<code>swift_browser_ui.request.bindings.bind</code>	Async Python bindings for the swift-x-account-sharing backend.
<code>swift_browser_ui.request.api</code>	Module for share request API handlers.
<code>swift_browser_ui.request.db</code>	Module for sharing request database interface using postgres.
<code>swift_browser_ui.request.server</code>	Share request backend module.

9.18 swift_browser_ui.request.bindings.bind

Async Python bindings for the swift-x-account-sharing backend.

Classes

<code>SwiftSharingRequest(url)</code>	Swift Sharing Request backend client.
---------------------------------------	---------------------------------------

9.19 swift_browser_ui.request.api

Module for share request API handlers.

Functions

<code>handle_container_request_listing(request)</code>	Handle query for listing the container share requests.
<code>handle_health_check(request)</code>	Answer a service health check.
<code>handle_share_request_post(request)</code>	Handle query for posting a new share request.
<code>handle_user_add_token(request)</code>	Add a token to the user.
<code>handle_user_delete_token(request)</code>	Delete a token from the user.
<code>handle_user_list_tokens(request)</code>	Get project token listing.
<code>handle_user_made_request_listing(request)</code>	Handle query listing for the requests created by the user.
<code>handle_user_owned_request_listing(request)</code>	Handle query for listing the requests owned by the user.
<code>handle_user_share_request_delete(request)</code>	Delete container share request or requests.

9.20 swift_browser_ui.request.db

Module for sharing request database interface using postgres.

Classes

<code>DBConn()</code>	Class for handling sharing request database connection.
-----------------------	---

9.21 swift_browser_ui.request.server

Share request backend module.

Functions

<code>graceful_shutdown(app)</code>	Correctly close the service.
<code>init_server()</code>	Initialize the sharing request server.
<code>main()</code>	Run the server with the default run function.
<code>resume_on_start(app)</code>	Resume old instance on start.
<code>run_server_devel(app)</code>	Run the server in development mode (without HTTPS).

Runner for swift-browser-ui upload and replication operations.

<code>swift_browser_ui.upload.api</code>	API handlers for swift-upload-runner.
<code>swift_browser_ui.upload.auth</code>	Authorization handlers for swift-upload-runner.
<code>swift_browser_ui.upload.common</code>	Common resources for swift-upload-runner.
<code>swift_browser_ui.upload.download</code>	Server object and container download handlers using aiohttp.
<code>swift_browser_ui.upload.replicate</code>	Container and object replication handlers using aiohttp.
<code>swift_browser_ui.upload.server</code>	Server initialization functions.
<code>swift_browser_ui.upload.upload</code>	Server object upload handlers using aiohttp.

9.22 swift_browser_ui.upload.api

API handlers for swift-upload-runner.

Functions

handle_get_container(request)	Handle a request for getting container contents as an archive.
handle_get_object(request)	Handle a request for getting object content.
handle_get_object_chunk(request)	Handle a request for checking if a chunk exists.
handle_health_check(request)	Answer a service health check.
handle_post_object_chunk(request)	Handle a request for posting an object chunk.
handle_post_object_options(_)	Handle options request for posting the object chunk.
handle_replicate_container(request)	Handle request to replicating a container from a source.
handle_replicate_object(request)	Handle a request to replicating an object from a source.

9.23 swift_browser_ui.upload.auth

Authorization handlers for swift-upload-runner.

Functions

handle_login(request)	Begin a new session for the upload process.
handle_validate_authentication(request, handler)	Handle the authentication of a response as a middleware function.

9.24 swift_browser_ui.upload.common

Common resources for swift-upload-runner.

Functions

generate_download_url(host[, container, ...])	Generate the download URL to use.
get_download_host(endpoint, project)	Get the actual download host with shared container support.
get_path_from_list(to_parse, path_prefix)	Parse a path from a list of path parts.
get_session_id(request)	Return the session id from request.
get_upload_instance(request, pro, cont[, ...])	Return the specific upload proxy for the resumable upload.
parse_multipart_in(request)	Parse the form headers into a dictionary and chunk data as reader.

9.25 swift_browser_ui.upload.download

Server object and container download handlers using aiohttp.

Classes

<code>ContainerArchiveDownloadProxy(session, ...)</code>	Class for downloading a whole container as an archive.
<code>FileDownloadProxy(session[, chunk_size])</code>	A class for a single proxied download.
<code>TarInputWrapper(session, project, container, ...)</code>	Wrap the file download proxy for tar to treat as a binary file.
<code>TarQueueWrapper()</code>	Wrap <code>queue.Queue</code> class for tar to treat as a binary file.

9.26 swift_browser_ui.upload.replicate

Container and object replication handlers using aiohttp.

Classes

<code>ObjectReplicationProxy(session, client, ...)</code>	A class for replicating objects.
---	----------------------------------

9.27 swift_browser_ui.upload.server

Server initialization functions.

Functions

<code>kill_client(app)</code>	Kill the app client session.
<code>main()</code>	.
<code>run_server(app)</code>	Run the server.
<code>servinit()</code>	Create an aiohttp server for handling the upload runner API.

9.28 swift_browser_ui.upload.upload

Server object upload handlers using aiohttp.

Classes

<code>ResumableFileUploadProxy(session, query, ...)</code>	A class for a single proxied upload.
--	--------------------------------------

[genindex](#) | [modindex](#)

Note: Unit tests and integration tests are automatically executed with every PR

10.1 Unit Testing

In order to run the unit tests, security checks with `bandit`, Sphinx documentation check for links consistency and HTML output and `flake8` (coding style guide) `tox`. To run the unit tests and UI tests in parallel use:

```
$ tox -p auto
```

To run environments separately use:

```
$ # list environments
$ tox -l
$ # run flake8
$ tox -e flake8
$ # run bandit
$ tox -e bandit
$ # run docs
$ tox -e docs
```

10.2 User Interface Testing

User Interface tests are developed using `cypress`, and the tests are developed for both Firefox and Chrome web browsers.

```
$ cd swift_browser_ui_frontend/
$ npm install
$ npm run build
$ cd ..
$ npm install cypress
$ npx cypress open
```


TOOLS USED IN PROJECT

11.1 Backend

The backend is written in Python, requiring at minimum Python version 3.6.8, but is tested with 3.7 and 3.8 as well. Additionally the following libraries are used in the program development:

- aiohttp for the API server
- uvloop for increasing server performance
- keystoneauth1 for authenticating with Openstack
- python-swiftclient for communicating with Openstack Swift API
- cryptography for encrypting session cookies
- click for quickly providing a CLI for the server

11.2 Frontend

The frontend is written as an SPA (Single Page Application), in *ES6* Javascript. The frontend code is not tested for cross-compilation to *ES5*. The following libraries are used in writing the frontend:

- Vue.js for site functionality and DOM manipulation
- Vue router for site routing support
- Vue i18n for language support
- Buefy for site styling and components
- Buefy also comes with bulma for css framework
- Lodash for mostly debouncing functions to improve responsivity

11.3 Tests

Tests are written to be run with `Pytest`. The following libraries are used in writing the tests:

- `tox` for test automation
- `cypress` for UI test automation
- `pytest-timeout` for timing out UI tests, which can hang when failing

UI tests also require the WebDrivers for Chrome and Firefox, if tests are to be run locally.

- `WebDriver` for Chrome
- `WebDriver` for Firefox

11.4 Documentation

The documentation is automatically built with `sphinx`

11.4.1 Charts

The charts in documentation are made with `Dia`. The program is old fashioned, but versatile and can be installed without adding repositories, with the added benefit of not requiring the use of browser tools for making the charts. Charts are located in `docs/charts`, and the exported vector graphics file is linked into the documentation image directory.

Note: `swift-browser-ui` and all its sources are released under *MIT License*.

INDICES AND TABLES

- [genindex](#)
- [modindex](#)
- [search](#)

PYTHON MODULE INDEX

S

- swift_browser_ui.request, 29
- swift_browser_ui.request.api, 29
- swift_browser_ui.request.bindings.bind, 29
- swift_browser_ui.request.db, 30
- swift_browser_ui.request.server, 30
- swift_browser_ui.sharing, 27
- swift_browser_ui.sharing.api, 28
- swift_browser_ui.sharing.bindings.bind, 28
- swift_browser_ui.sharing.db, 28
- swift_browser_ui.sharing.server, 29
- swift_browser_ui.sharing.shared, 29
- swift_browser_ui.ui, 23
- swift_browser_ui.ui._convenience, 23
- swift_browser_ui.ui.api, 24
- swift_browser_ui.ui.discover, 24
- swift_browser_ui.ui.exceptions, 25
- swift_browser_ui.ui.front, 25
- swift_browser_ui.ui.login, 25
- swift_browser_ui.ui.middlewares, 25
- swift_browser_ui.ui.misc_handlers, 26
- swift_browser_ui.ui.server, 26
- swift_browser_ui.ui.settings, 26
- swift_browser_ui.ui.shell, 27
- swift_browser_ui.ui.signature, 27
- swift_browser_ui.upload, 30
- swift_browser_ui.upload.api, 31
- swift_browser_ui.upload.auth, 31
- swift_browser_ui.upload.common, 31
- swift_browser_ui.upload.download, 32
- swift_browser_ui.upload.replicate, 32
- swift_browser_ui.upload.server, 32
- swift_browser_ui.upload.upload, 33

M

module

- swift_browser_ui.request, 29
- swift_browser_ui.request.api, 29
- swift_browser_ui.request.bindings.bind, 29
- swift_browser_ui.request.db, 30
- swift_browser_ui.request.server, 30
- swift_browser_ui.sharing, 27
- swift_browser_ui.sharing.api, 28
- swift_browser_ui.sharing.bindings.bind, 28
- swift_browser_ui.sharing.db, 28
- swift_browser_ui.sharing.server, 29
- swift_browser_ui.sharing.shared, 29
- swift_browser_ui.ui, 23
- swift_browser_ui.ui._convenience, 23
- swift_browser_ui.ui.api, 24
- swift_browser_ui.ui.discover, 24
- swift_browser_ui.ui.exceptions, 25
- swift_browser_ui.ui.front, 25
- swift_browser_ui.ui.login, 25
- swift_browser_ui.ui.middlewares, 25
- swift_browser_ui.ui.misc_handlers, 26
- swift_browser_ui.ui.server, 26
- swift_browser_ui.ui.settings, 26
- swift_browser_ui.ui.shell, 27
- swift_browser_ui.ui.signature, 27
- swift_browser_ui.upload, 30
- swift_browser_ui.upload.api, 31
- swift_browser_ui.upload.auth, 31
- swift_browser_ui.upload.common, 31
- swift_browser_ui.upload.download, 32
- swift_browser_ui.upload.replicate, 32
- swift_browser_ui.upload.server, 32
- swift_browser_ui.upload.upload, 33
- swift_browser_ui.request.bindings.bind module, 29
- swift_browser_ui.request.db module, 30
- swift_browser_ui.request.server module, 30
- swift_browser_ui.sharing module, 27
- swift_browser_ui.sharing.api module, 28
- swift_browser_ui.sharing.bindings.bind module, 28
- swift_browser_ui.sharing.db module, 28
- swift_browser_ui.sharing.server module, 29
- swift_browser_ui.sharing.shared module, 29
- swift_browser_ui.ui module, 23
- swift_browser_ui.ui._convenience module, 23
- swift_browser_ui.ui.api module, 24
- swift_browser_ui.ui.discover module, 24
- swift_browser_ui.ui.exceptions module, 25
- swift_browser_ui.ui.front module, 25
- swift_browser_ui.ui.login module, 25
- swift_browser_ui.ui.middlewares module, 25
- swift_browser_ui.ui.misc_handlers module, 26
- swift_browser_ui.ui.server module, 26
- swift_browser_ui.ui.settings module, 26
- swift_browser_ui.ui.shell module, 27

S

- swift_browser_ui.request module, 29
- swift_browser_ui.request.api module, 29

- swift_browser_ui.request.bindings.bind module, 29
- swift_browser_ui.request.db module, 30
- swift_browser_ui.request.server module, 30
- swift_browser_ui.sharing module, 27
- swift_browser_ui.sharing.api module, 28
- swift_browser_ui.sharing.bindings.bind module, 28
- swift_browser_ui.sharing.db module, 28
- swift_browser_ui.sharing.server module, 29
- swift_browser_ui.sharing.shared module, 29
- swift_browser_ui.ui module, 23
- swift_browser_ui.ui._convenience module, 23
- swift_browser_ui.ui.api module, 24
- swift_browser_ui.ui.discover module, 24
- swift_browser_ui.ui.exceptions module, 25
- swift_browser_ui.ui.front module, 25
- swift_browser_ui.ui.login module, 25
- swift_browser_ui.ui.middlewares module, 25
- swift_browser_ui.ui.misc_handlers module, 26
- swift_browser_ui.ui.server module, 26
- swift_browser_ui.ui.settings module, 26
- swift_browser_ui.ui.shell module, 27

swift_browser_ui.ui.signature
 module, [27](#)
swift_browser_ui.upload
 module, [30](#)
swift_browser_ui.upload.api
 module, [31](#)
swift_browser_ui.upload.auth
 module, [31](#)
swift_browser_ui.upload.common
 module, [31](#)
swift_browser_ui.upload.download
 module, [32](#)
swift_browser_ui.upload.replicate
 module, [32](#)
swift_browser_ui.upload.server
 module, [32](#)
swift_browser_ui.upload.upload
 module, [33](#)